



# INSTALLATION INSTRUCTIONS

Part Number KA-4093

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

## INSTALLATION

1. Remove the stock filter  
**Note:** You will not use the stock air filter holder with the K&N Filtercharger®.
2. Remove the top plate with the tab from stock air filter.
3. Wipe the bottom side of the stock top plate.
4. Apply the supplied gasket to the bottom side of stock top plate.(Fig. 1)
5. Using the stock screw, place the stock top plate on the K&N Filtercharger® and tighten it completely. (Fig. 2)
6. Install the K&N Filtercharger® into the air box.
7. Use the stock screw for the tab on the top plate and bolt into the air box and tighten. (Fig. 3)
8. Tighten the clamp on the K&N Filtercharger® once the flange is seated.
9. Reinstall the air box lid.

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**

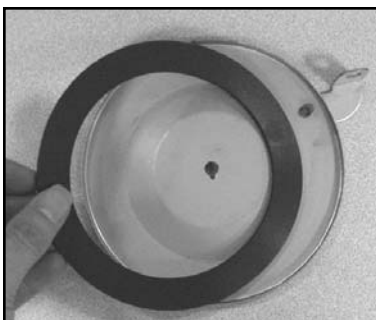


Fig. 1



Fig. 2

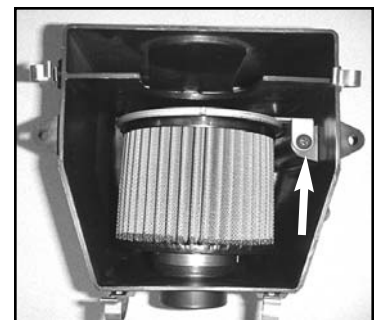


Fig. 3