

K&N Installation Instructions **Part Number 33-2207**

This filter fits: See current catalog for current applications.

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure MUST be followed to ensure a proper fit and seal of the K&N Filtercharger®.

1. Carefully disconnect the electrical connector for the Mass Air sensor. (See Fig 1)
2. Unfasten the hose clamp on the air intake tube and disconnect the tube from the Mass Air sensor. (See Fig 1)
3. Remove the airbox lid from the base.
4. Remove the dirty filter from the airbox base.
5. Wipe out any dust or dirt from the inside of the air filter housing with a damp rag. The air filter housing must be clean and dry so the gasket will stick to it.
6. Apply the self-sticking gasket around the edge of the airbox lid. (See Fig 2)
7. Install the K&N FILTERCHARGER into the airbox base.
8. Re-install the airbox lid onto the airbox base in reverse order of removal. Be careful not to roll the gasket off the lid while doing this.
9. Re-install the air intake tube and tighten the hose clamp.
10. Re-connect the Mass Air sensor connector.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

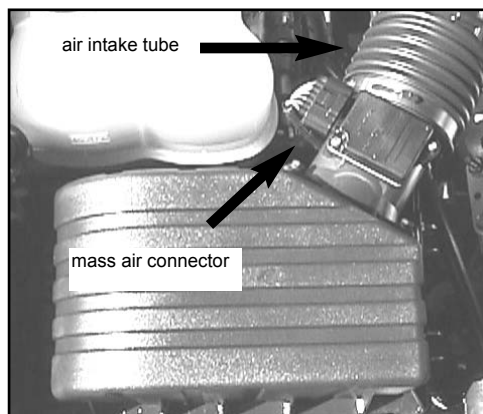


Fig. 1

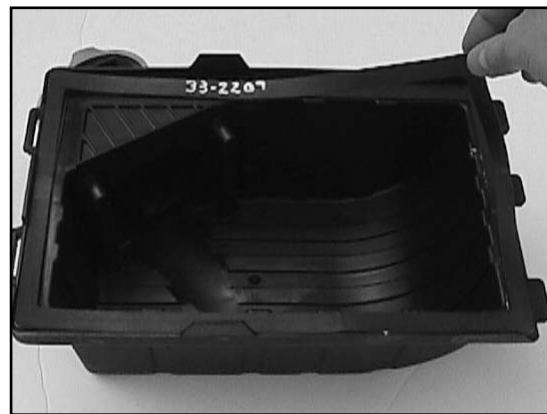


Fig. 2