



INSTALLATION INSTRUCTIONS

Part Number E-0778

This filter fits: See current catalog for applications

FREE K&N DECAL** To register your warranty, please see us online at knfilters.com/register. **FREE K&N DECAL

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedures **MUST** be followed to ensure the proper fit and seal of the K&N *Filtercharger*®.

1. Unfasten air box clamps, open the air box and remove the dirty air filter.
2. Wipe out any dirt or dust that may be inside the air filter housing.
3. Install the two supplied rubber plugs into the holes left after removing the OE air filter screws. Install plugs from outside in. (See Fig. 1)
4. Use pliers to pull the plugs through the air box wall until seated. (See Fig. 2 & Fig. 3)
5. Install the K&N air filter large flange end first into the air box base. Be sure to fully seat filter into air box. (See Fig. 4)
6. Close air box making sure that small flange end of the K&N air filter enters air box lid properly. (See Fig. 5)
7. Press air box closed and fasten the air box clamps.

NOTE: FAILURE TO FOLLOW INSTALLATION INSTRUCTIONS AND NOT USE THE PROVIDED HARDWARE MAY IMPAIR THE PERFORMANCE OF YOUR FILTER AND DAMAGE YOUR ENGINE.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1



Fig. 2



Fig. 3



Fig. 4

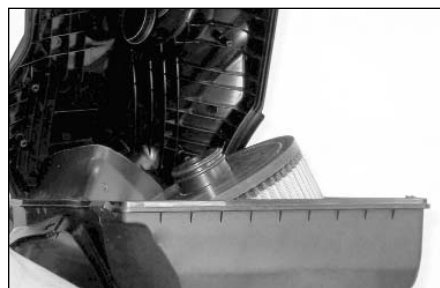


Fig. 5